



# Smoothing Inlet

For pre-filtered water


- Prevents swirling up of sediment
- Important third cleaning stage
- Extremely simple installation without tools
- Suitable for Standard KG pipes
- Clear water stays clear
- High quality stainless steel



To prevent sediment disturbance and to distribute fresh, oxygen-enriched rainwater in the storage tank.




## WISY Rainwater Harvesting

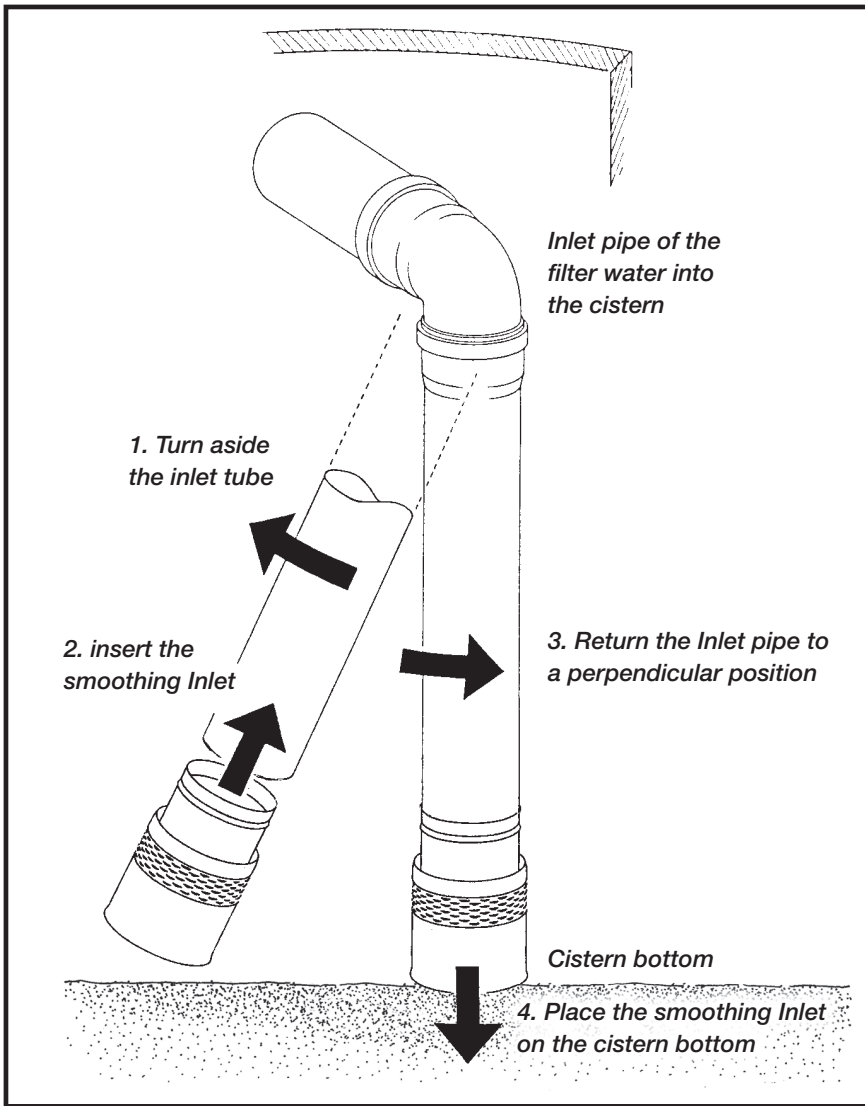

The smoothing inlet is a real water brake which creates an upwards directed and widespread calm entry of water into the cistern. The soil sediment remains completely untouched.

	DN 110	DN 125	DN 200
Diameter:	13 cm	17 cm	28 cm
Height:	18 cm	24 cm	42 cm
Material:	Stainless steel 1.4301		

*Optionally with telescopic pull-out. This saves tedious adjustment work in the cistern. The length of the inlet pipe fits immediately. Telescopic extension and inlet stabilisation, suitable for all DN 110 inlet pipes.*

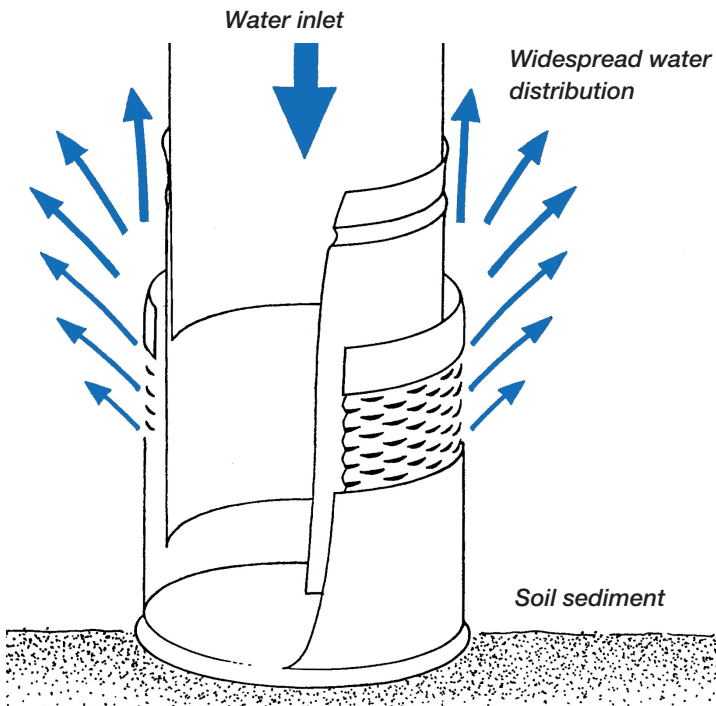

**WISY AG**  
 D-63699 Kefenrod, Oberdorfstraße 26  
 Telefon +49 (0) 60 54-91 21-0

Fax +49 (0) 60 54-91 21-29

Internet: [www.wisy.de](http://www.wisy.de)

E-Mail: [info@wisy.de](mailto:info@wisy.de)